Jackson

Conserver™ AXL2

Project _____

Item _____

Quantity _____

CSI Section 11400 _____

Approval _____

Date _____

Door Type

Models

☐ Conserver™ AXL2 ☐ Conserver™ AXL2-CMR ☐ Conserver™ AXL2-CML

Standard Features

- Universal timer
- Built in waste accumulator
- 3" (76 mm) stainless steel adjustable bullet feet
- Delimer switch for easy removal of hard water deposits
- Removable scrap screen
- Three selectable timer cycles
- Air gap instead of vacuum breaker
- Door safety switch
- Convenient top mounted controls
- Auto start
- Interchangeable stainless steel arms
- Internal sump saves space

Mandatory Specs

- Specify voltage

Optional Features

☐ Solid bowl option

Accessory Items

☐ 36 Compartment racks
(4-1/8", 5-5/8", or 7")
(105 mm, 143 mm, 178 mm)
☐ Combination rack
☐ Peg rack
☐ Sanitizer alarm
☐ Scaltrol
☐ Water hammer arrestor

Specifications

Uses 1.5 gallons (6 liters) of water per rack

74 rack per hour

Single point electrical connection

Self-draining stainless steel pump eliminates soil/detergent carryover between wash and rinse cycles

Dump and fill feature disposes of dirty water, replacing it with a fresh water rinse every cycle

Field convertible from straight to corner and corner to straight for flexible installations and applications.

Dual-point drain connections allow for versatile installations

17-1/4" (438 mm) vertical inside clearance

3 built-in dispensing pumps for detergent, rinse agent and sanitizer are controlled by individual priming switches

Fully automatic timed cycles - 90 seconds, 3 minutes or 5 minutes

Accommodates 2 racks side by side

Heavy duty stainless steel construction

UL

NSF

c UL us LISTED

Highway 25E
P. O. Box 1060
Barbourville, KY 40906

Tel: 606-523-9795
Tel: 1-888-800-5672
Fax: 606-523-9196
E-mail: info@jacksonmsc.com

www.jacksonmsc.com

07610-003-38-81 (08/07)

Enodis

Conserver™ AXL2

LEGEND:

A - Electrical connection
B - Water inlet 1/2" I.P.S
C - Drain connection 2" I.P.S

All vertical dimensions are +/- 1/2" from floor due to adjustable bullet feet.

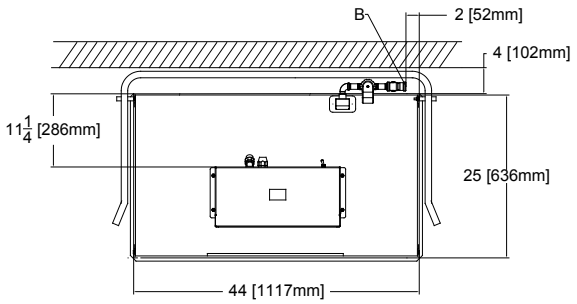

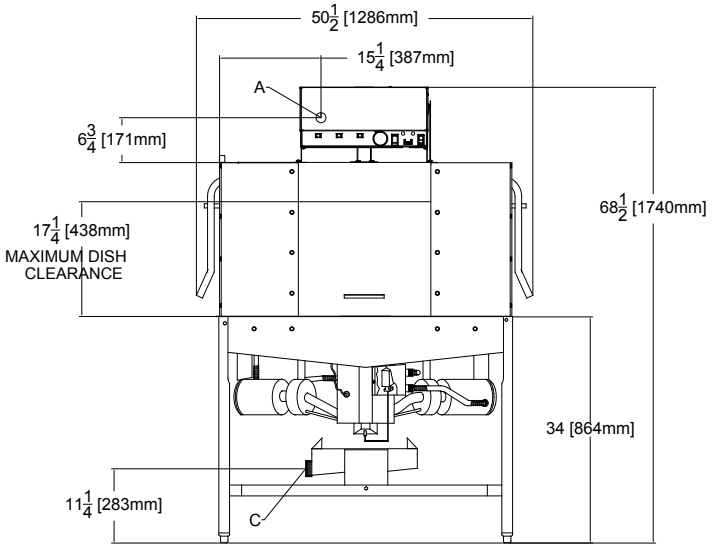

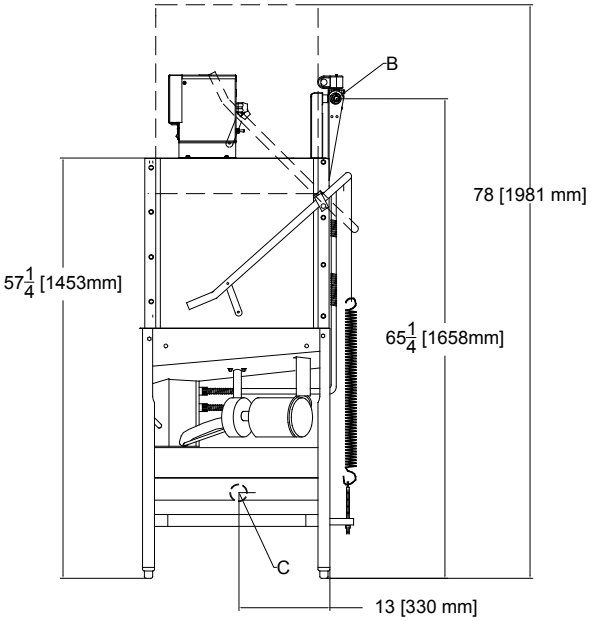

POWER REQUIREMENTS

MODEL	ELECTRICAL REQUIREMENT	SERVICE BREAKER SIZE
Conserver™ AXL2	115v/60~1ø-22.8A	30A

WATER REQUIREMENTS

	MINIMUM	RECOMMENDED
Inlet Temperature	120°F 48.9ºC	140°F 60.0ºC
Wash Operating Temperatures	120°F 48.9ºC	140°F 60.0ºC
Rinse Operating Temperatures	120°F 48.9ºC	140°F 60.0ºC

PERFORMANCE CAPABILITIES

Flow Pressure (PSI)	15-25
Wash Pump Motor Horsepower	3/4
Pump Capacity (GPM)	55
Minimum Chlorine Required (PPM)	50

Legend
A - Electrical Connection
B - Water Connection, ¼"

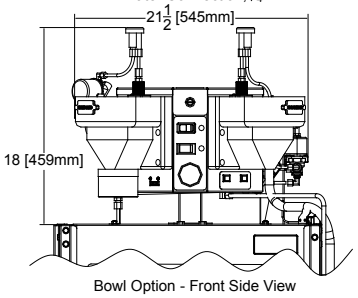

Bowl Option - Front Side View

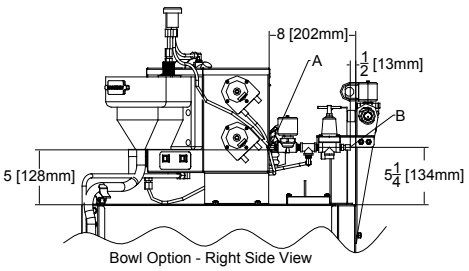

Bowl Option - Right Side View

DIMENSIONS--INCHES (mm)--STANDARD MODEL

MODEL NO.	SIZE			DRAIN HEIGHT	SHIPPING INFO			DIMENSIONS		
	HEIGHT	WIDTH	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
Conserver™ AXL2	68-1/2″ (1740 mm)	50-1/2″ (1286 mm)	25″ (636 mm)	11-1/4″ (283 mm)	560 lbs (254 kg)	92.5	74.8″ cu. ft.	78″ (1981 mm)	55″ (1397 mm)	30″ (762 mm)

HOW TO SPECIFY- EXAMPLE:

Conserver™ AXL2 - Chemical sanitizing, 115 volt, 1 phase

LEGEND:

A - Electrical connection
B - Water inlet 1/2" I.P.S
C - Drain connection 2" I.P.S

All vertical dimensions are +/- 1/2" from floor due to adjustable bullet feet.

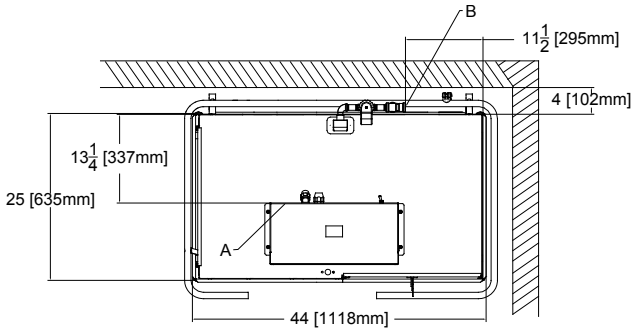

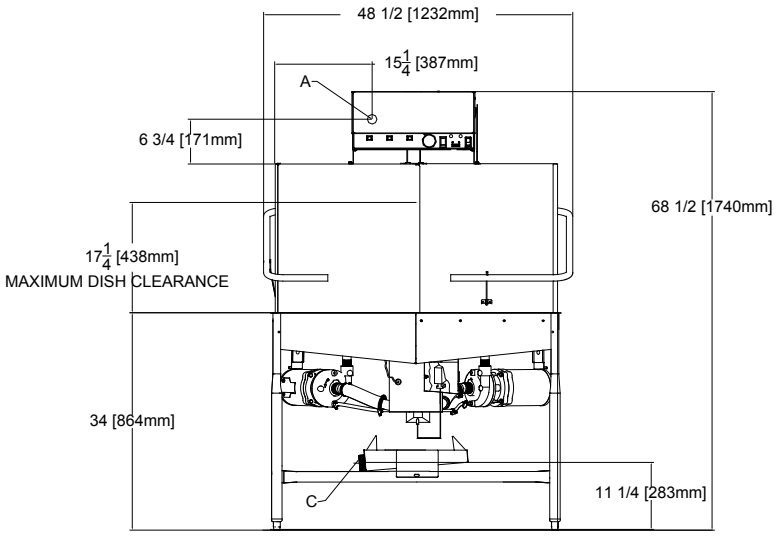

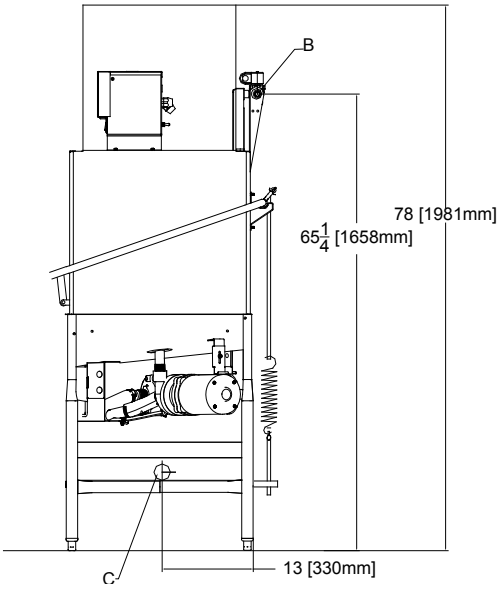

POWER REQUIREMENTS

MODEL	ELECTRICAL REQUIREMENT	SERVICE BREAKER SIZE
Conserver™ AXL2-CMR	115v/60~1ø-22.8A	30A

WATER REQUIREMENTS

	MINIMUM	RECOMMENDED
Inlet Temperature	120°F 49°C	140°F 60°C
Wash Operating Temperatures	120°F 49°C	140°F 60°C
Rinse Operating Temperatures	120°F 49°C	140°F 60°C

PERFORMANCE CAPABILITIES

Flow Pressure (PSI)	15-25
Wash Pump Motor Horsepower	3/4
Pump Capacity (GPM)	55
Minimum Chlorine Required (PPM)	50



Bowl Option - Front Side View

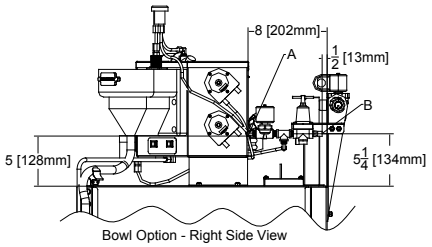

Bowl Option - Right Side View

DIMENSIONS--INCHES (mm)--STANDARD MODEL

MODEL NO.	SIZE			DRAIN HEIGHT	SHIPPING INFO			DIMENSIONS		
	HEIGHT	WIDTH	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
Conserver™ AXL2-CMR	68-1/2″ (1740 mm)	48-1/2″ (1232 mm)	25″ (635 mm)	11-1/4″ (283 mm)	560 lbs (254 kg)	92.5	74.8″ cu. ft.	78″ (1981 mm)	55″ (1397 mm)	30″ (762 mm)

HOW TO SPECIFY - EXAMPLE:

Conserver™ AXL2-CMR - Chemical sanitizing, 115 volt, 1 phase

Jackson

Conserver™ AXL2-CML

LEGEND:

A - Electrical connection
B - Water inlet 1/2" I.P.S
C - Drain connection 2" I.P.S

All vertical dimensions are +/- 1/2" from floor due to adjustable bullet feet.

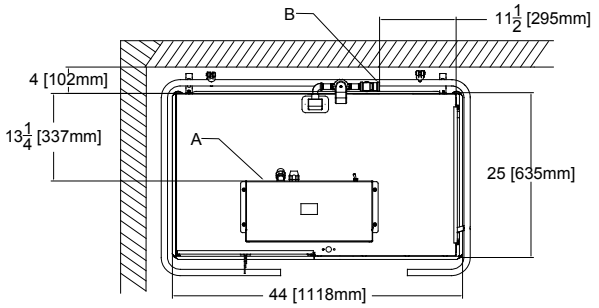

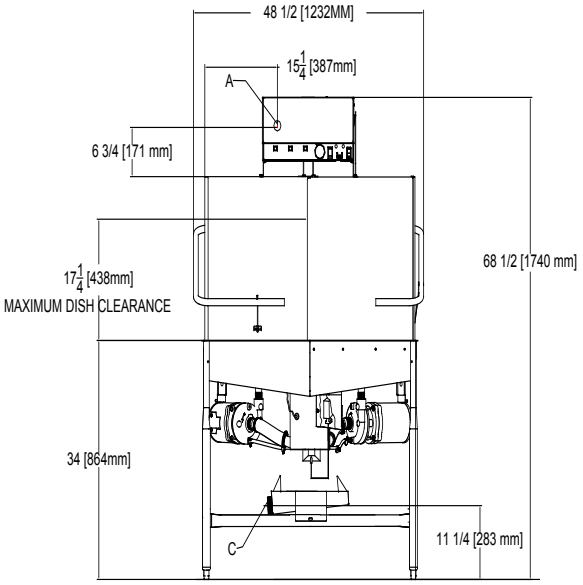

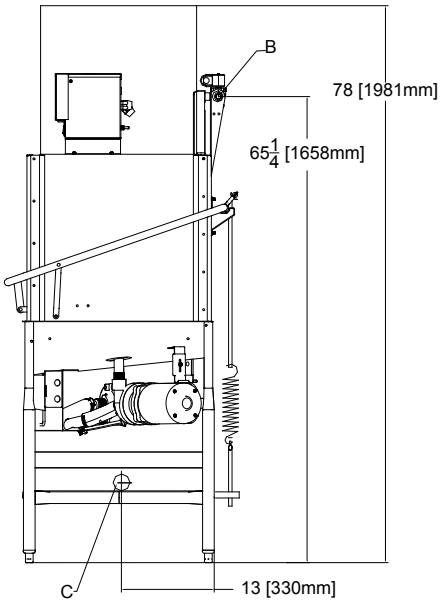

Legend
A - Electrical Connection
B - Water Connection, ¼"



Bowl Option - Front Side View

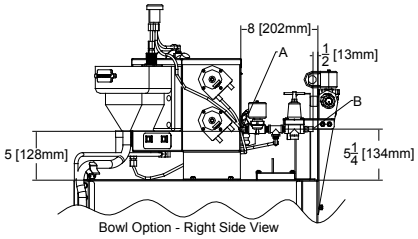

Bowl Option - Right Side View

POWER REQUIREMENTS

MODEL	ELECTRICAL REQUIREMENT	SERVICE BREAKER SIZE
Conserver™ AXL2-CML	115v/60~1ø-22.8A	30A

WATER REQUIREMENTS

	MINIMUM	RECOMMENDED
INLET TEMPERATURE	120°F 49°C	140°F 60°C
WASH OPERATING TEMPERATURES	120°F 49°C	140°F 60°C
RINSE OPERATING TEMPERATURES	120°F 49°C	140°F 60°C

PERFORMANCE CAPABILITIES

Flow Pressure (PSI)	15-25
Wash Pump Motor Horsepower	3/4
Pump Capacity (GPM)	55
Minimum Chlorine Required (PPM)	50

DIMENSIONS--INCHES (mm)--STANDARD MODEL

MODEL NO.	SIZE			DRAIN HEIGHT	SHIPPING INFO			DIMENSIONS		
	HEIGHT	WIDTH	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
Conserver™ AXL2-CML	68-1/2″ (1740 mm)	48-1/2″ (1232 mm)	25″ (635 mm)	11-1/4″ (283 mm)	560 lbs (254 kg)	92.5	74.8″ cu. ft.	78″ (1981 mm)	55″ (1397 mm)	30″ (762 mm)

HOW TO SPECIFY - EXAMPLE:

Conserver™ AXL2-CML - Chemical sanitizing, 115 volt, 1 phase

Highway 25E
P. O. Box 1060
Barbourville, KY 40906

Tel: 606-523-9795
Tel: 1-888-800-5672
Fax: 606-523-9196
E-mail: info@jacksonmsc.com

www.jacksonmsc.com

07610-003-38-81 (08/07)

Enodis

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold.